



US009236257B2

(12) **United States Patent**
Hatem et al.

(10) **Patent No.:** **US 9,236,257 B2**
(45) **Date of Patent:** **Jan. 12, 2016**

(54) **TECHNIQUES TO MITIGATE STRAGGLE DAMAGE TO SENSITIVE STRUCTURES**

257/365-369, E21.346, E21.334-E21.336,
257/E21.214, E21.008, E21.421, E21.121,
257/E21.43

(71) Applicant: **Varian Semiconductor Equipment Associates, Inc.**, Gloucester, MA (US)

See application file for complete search history.

(72) Inventors: **Christopher R. Hatem**, Salisbury, MA (US); **Anthony Renau**, West Newbury, MA (US); **John J. Hautala**, Beverly, MA (US); **Ludovic Godet**, Boston, MA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,144,101 A 3/1979 Rideout
5,217,924 A * 6/1993 Rodder et al. 438/301

(Continued)

FOREIGN PATENT DOCUMENTS

JP 09-162137 A 6/1997
JP 2007-096245 A 4/2007

OTHER PUBLICATIONS

International Search Report and Written Opinion mailed Jun. 30, 2014 for PCT/US2014/023473 Filed Mar. 11, 2014.

Primary Examiner — Amar Movva
Assistant Examiner — Sheikh Maruf

(57) **ABSTRACT**

A method for processing a substrate includes providing a set of patterned structures separated by a first gap on the substrate and directing first implanting ions to the substrate at a first ion energy, where the first implanting ions are effective to impact the substrate in regions defined by the first gap. The method also includes directing depositing ions to the substrate where the second ions are effective to deposit material on at least a portion of the set of patterned structures to form expanded patterned structures, where the expanded patterned structures are characterized by a second gap smaller than the first gap. The method further includes directing second implanting ions to the substrate at a second ion energy, where the second implanting ions effective to impact the substrate in regions defined by the second gap, the second ion energy comprising a higher ion energy than the first ion energy.

12 Claims, 8 Drawing Sheets

(73) Assignee: **Varian Semiconductor Equipment Associates, Inc.**, Gloucester, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/799,022**

(22) Filed: **Mar. 13, 2013**

(65) **Prior Publication Data**

US 2014/0273502 A1 Sep. 18, 2014

(51) **Int. Cl.**

H01L 21/31 (2006.01)
H01L 21/20 (2006.01)
H01L 21/00 (2006.01)


(Continued)

(52) **U.S. Cl.**

CPC **H01L 21/2236** (2013.01); **C23C 14/042** (2013.01); **C23C 14/48** (2013.01); **H01J 37/3171** (2013.01); **H01J 37/32357** (2013.01); **H01J 37/32422** (2013.01); **H01J 37/32899** (2013.01); **H01L 21/266** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC . H01L 21/265; H01L 21/8238; H01L 27/092; H01L 21/3205; H01L 21/00; H01L 21/266; C23C 14/48; B01J 17/00; G03C 5/00
USPC 438/478, 373, 506, 766, 3, 40-45, 57, 438/73, 155, 257, 268, 283, 390, 400, 438/513-519, 524-527; 257/E21.057,

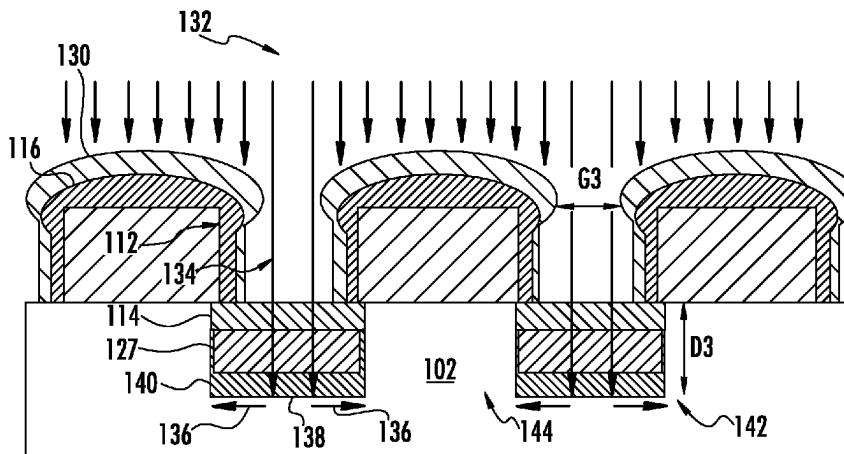

- (51) **Int. Cl.**
H01L 21/223 (2006.01)
H01L 21/265 (2006.01)
H01L 21/266 (2006.01)
H01L 43/12 (2006.01)
C23C 14/48 (2006.01)
H01J 37/317 (2006.01)
H01J 37/32 (2006.01)
H01L 21/67 (2006.01)
H01L 21/677 (2006.01)
C23C 14/04 (2006.01)
- (52) **U.S. Cl.**
 CPC *H01L 21/26513* (2013.01); *H01L 21/6776*
 (2013.01); *H01L 21/67213* (2013.01); *H01L*
43/12 (2013.01)

(56) **References Cited**
 U.S. PATENT DOCUMENTS

5,523,241	A *	6/1996	Wan et al.	438/73
6,165,811	A	12/2000	Lee et al.	
6,670,103	B2	12/2003	Chang	
7,288,491	B2	10/2007	Collins et al.	
2006/0030167	A1 *	2/2006	Henley	438/798
2006/0156979	A1 *	7/2006	Thakur et al.	118/715
2009/0179272	A1 *	7/2009	Campi et al.	257/365
2011/0124186	A1 *	5/2011	Renau et al.	438/513
2012/0064694	A1 *	3/2012	Booth et al.	438/390
2012/0070969	A1 *	3/2012	Tanaka	438/527
2012/0112280	A1 *	5/2012	Johnson et al.	257/347
2014/0072397	A1 *	3/2014	Mooring	414/805
2014/0147985	A1 *	5/2014	John et al.	438/424
2014/0167143	A1 *	6/2014	Schmidt	257/329
2014/0174354	A1 *	6/2014	Arai	118/719

* cited by examiner

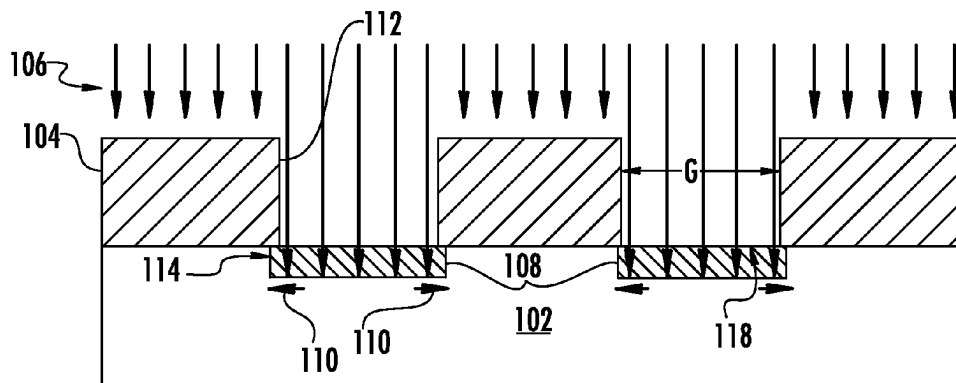


FIG. 1A

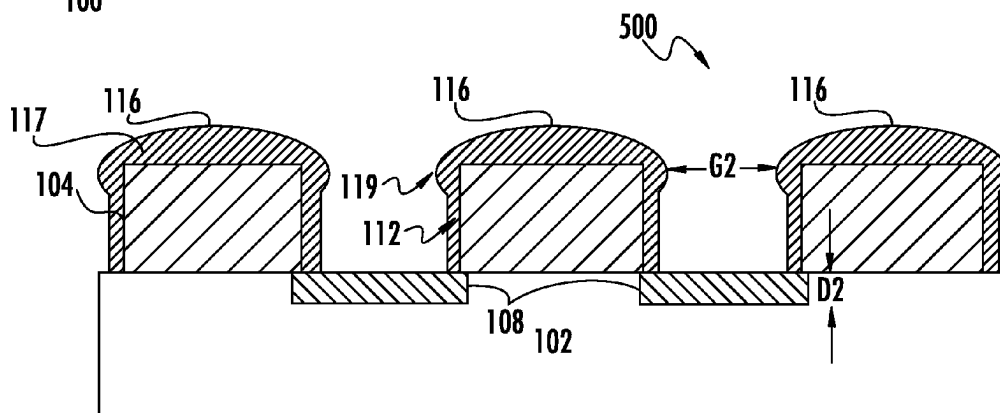


FIG. 1B

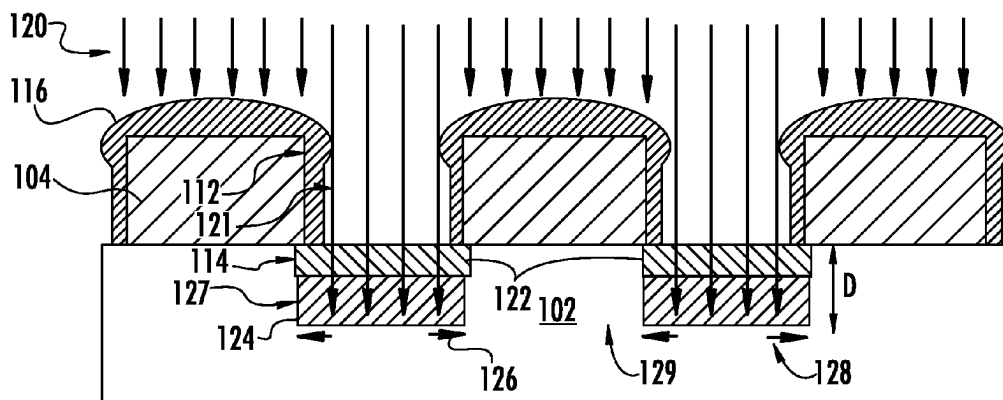


FIG. 1C

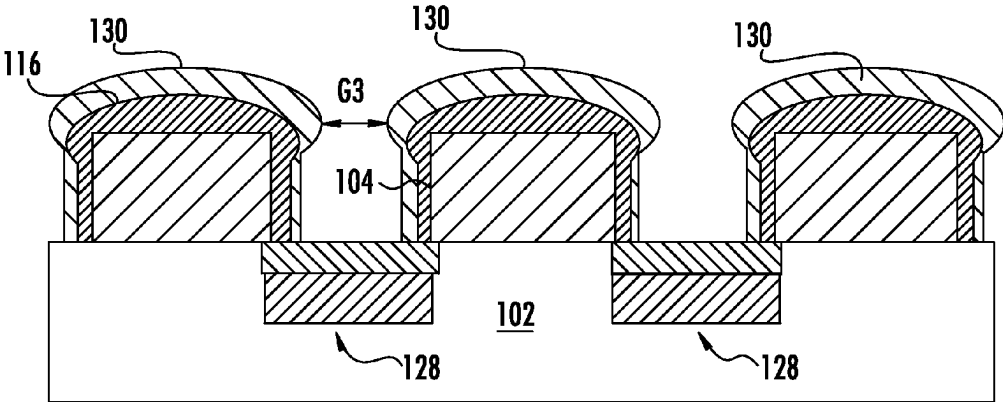


FIG. 1D

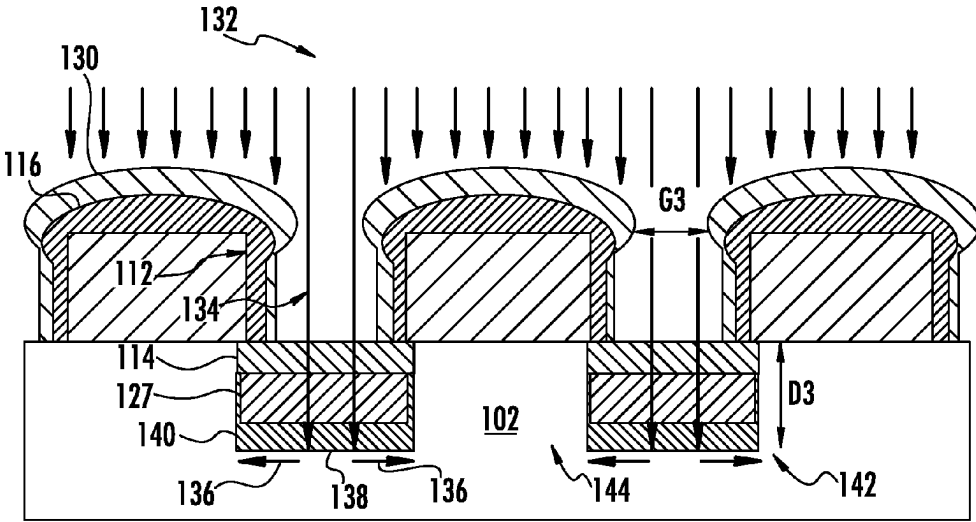
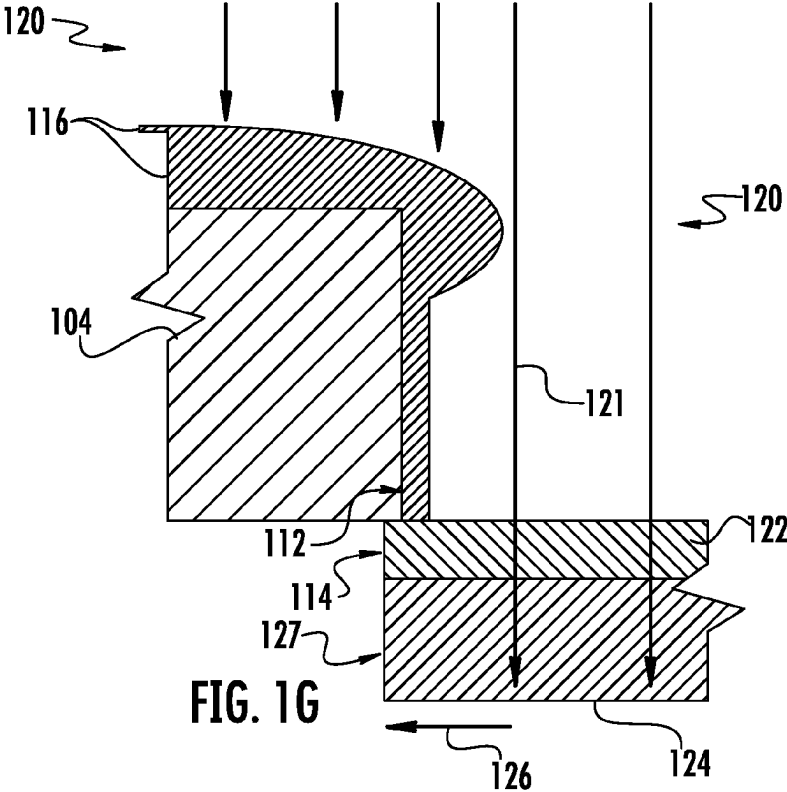
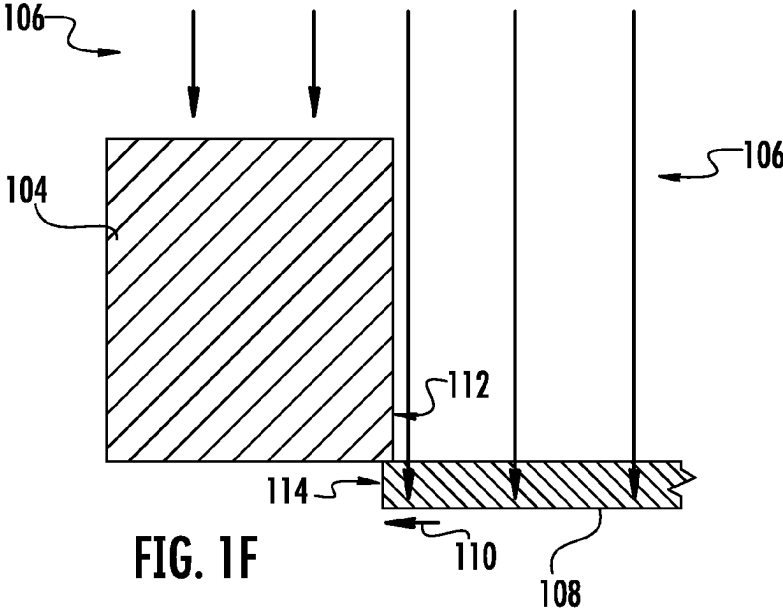


FIG. 1E



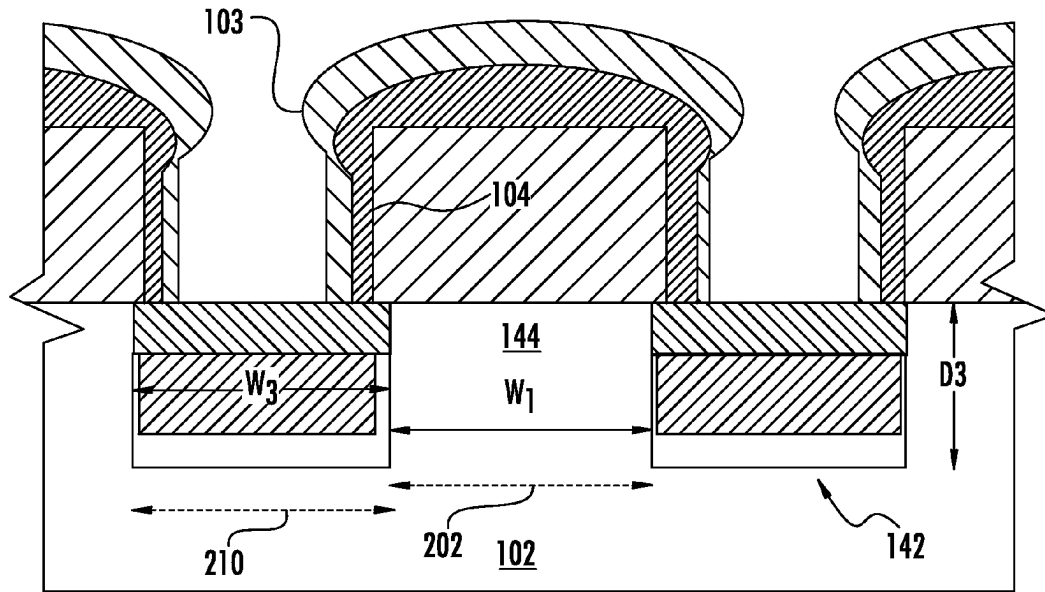


FIG. 2A

100

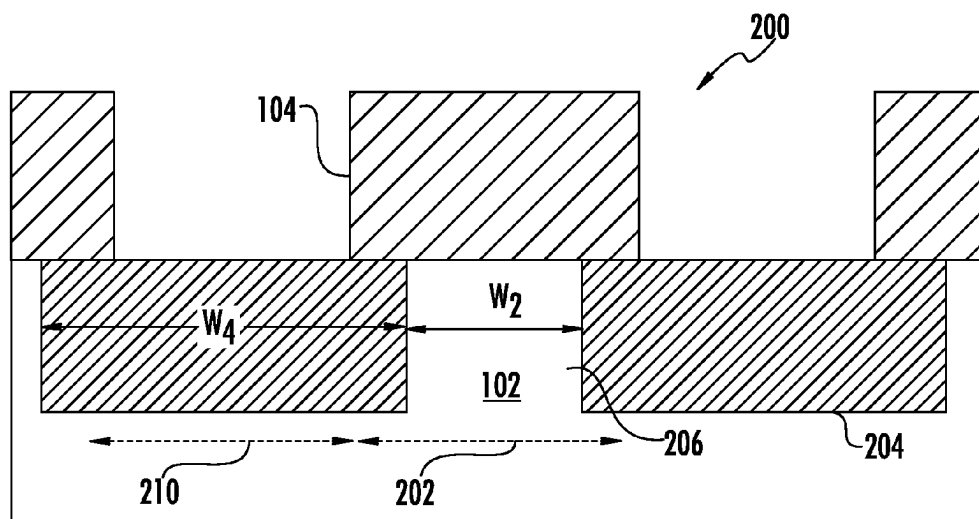


FIG. 2B
(PRIOR ART)

200

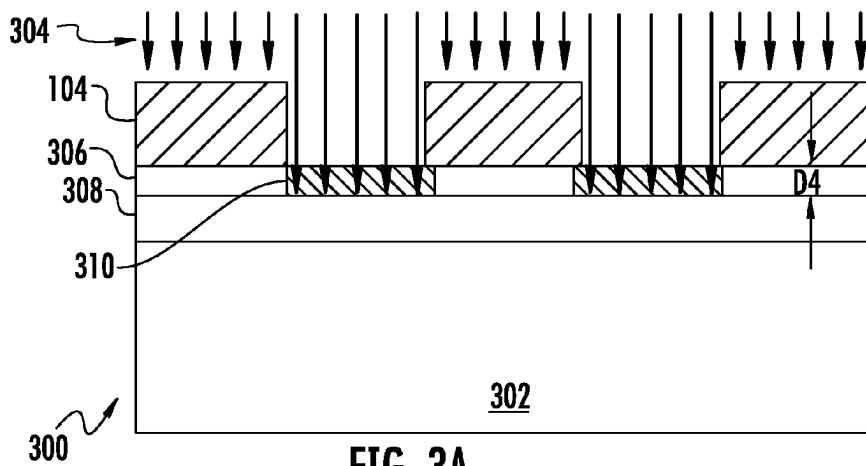


FIG. 3A

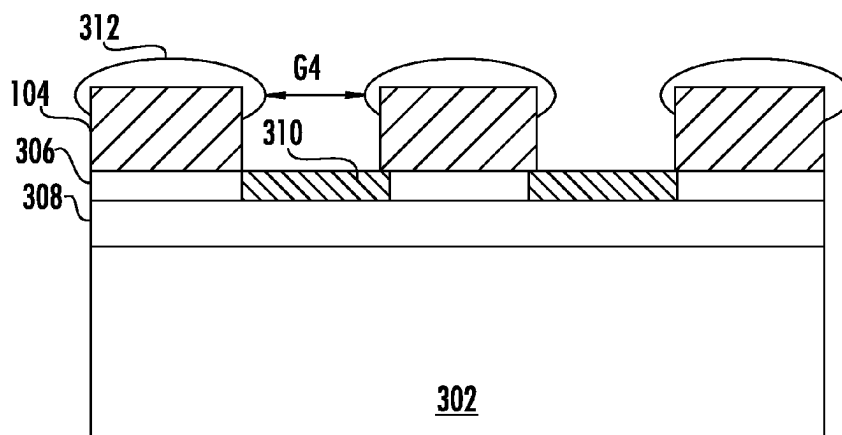


FIG. 3B

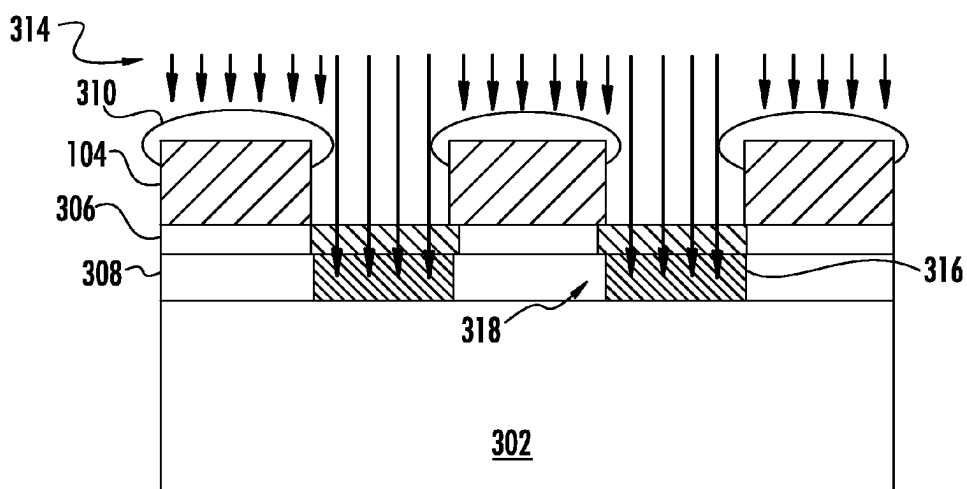


FIG. 3C

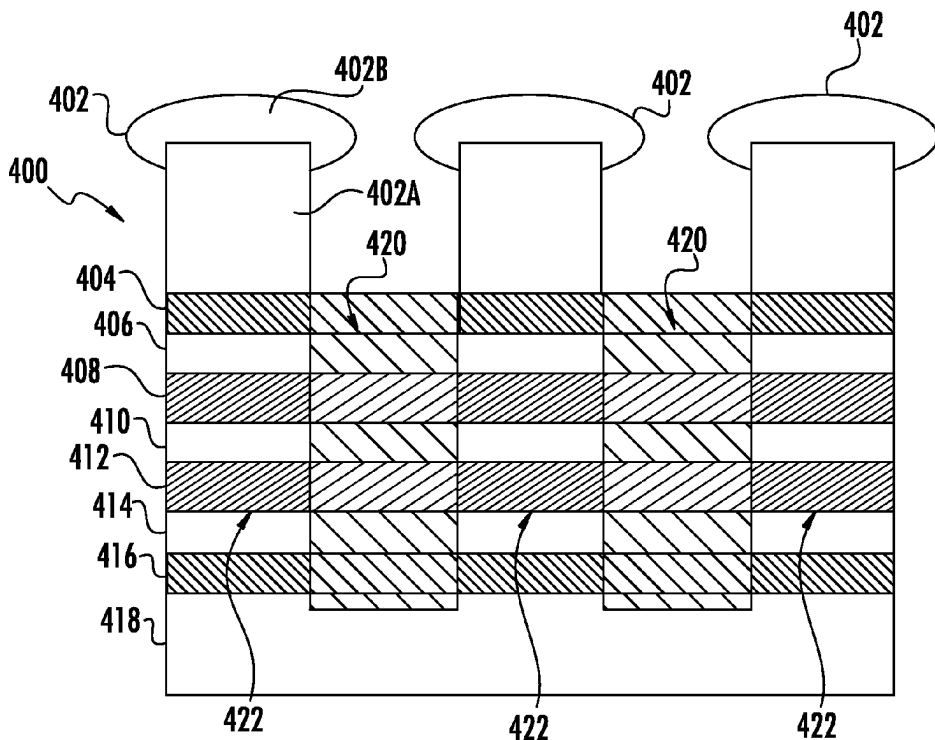


FIG. 4A

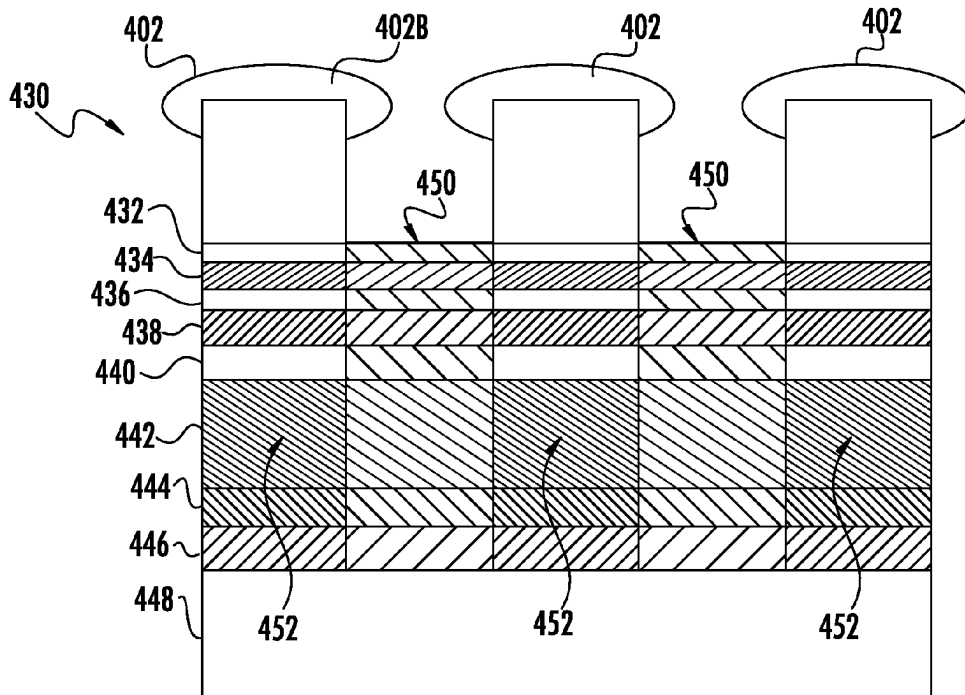


FIG. 4B

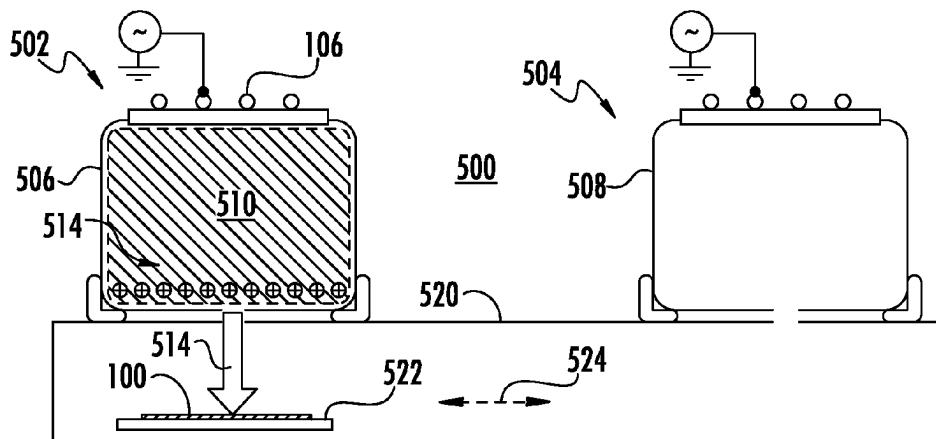


FIG. 5A

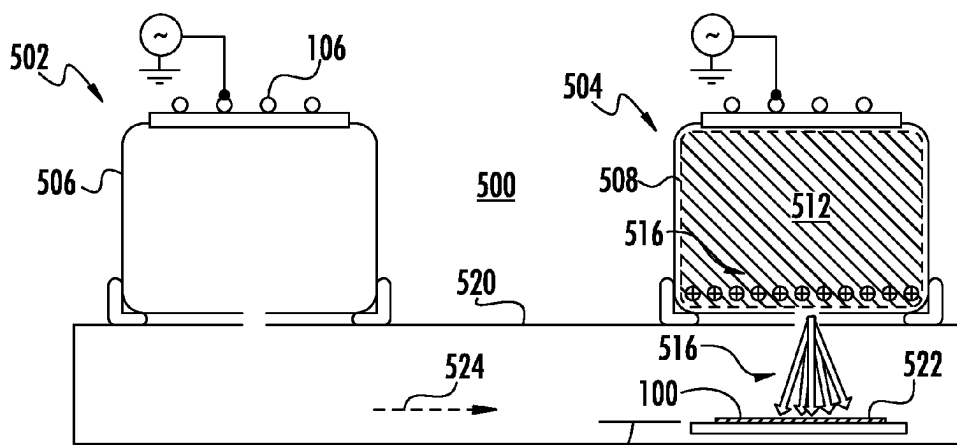


FIG. 5B

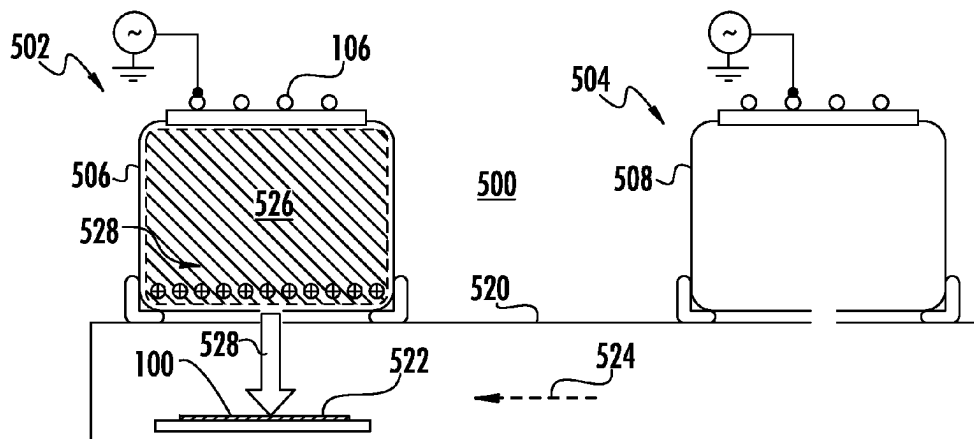


FIG. 5C

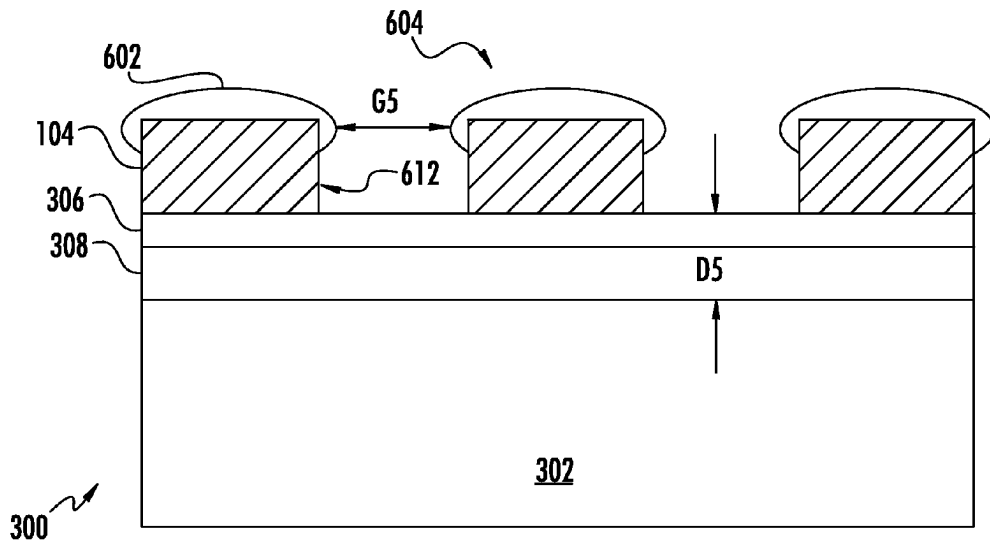


FIG. 6A

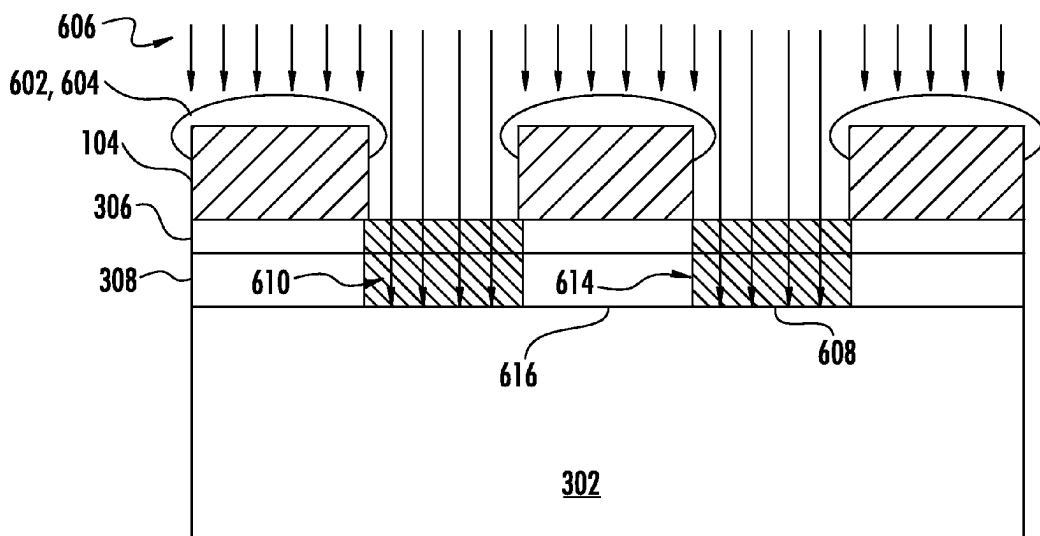


FIG. 6B

1

TECHNIQUES TO MITIGATE STRAGGLE DAMAGE TO SENSITIVE STRUCTURES

BACKGROUND OF THE INVENTION

1. Field of the Invention

Embodiments relate to the field of substrate patterning an more particularly to processing patterned substrates with ions.

2. Discussion of Related Art

Modern devices such as processors, semiconductor memory, magnetic, optical and other storage devices, as well as microelectromechanical (MEMS) devices continue to scale to smaller dimensions, which affords greater performance, efficiency, and economy. In order to facilitate shrinking of device dimensions patterning techniques such as lithography and etching, and substrate cleaning continue to undergo improvement. However, the shrinking of device dimensions places challenges on various substrate processing techniques in particular because of the absolute size of substrate features as well as aspect ratio and material properties of such features. In one example ion beam or plasma processing have found increasing use for etch and cleaning steps for various substrate device technologies.

In the example of bit patterned media, ion beam processing has been identified as a technique for cleaning as well as magnetic deadening of device structures. However, such ion beam processing may introduce damage to sidewall structures caused by straggle of implanted ions. In the case of patterning of magnetic random access memory (MRAM) one type of cleaning step requires the removal of residue within a gap between adjacent fin-like structures. Because straggle or lateral movement of implanted ions scales with the implanted ion energy, the use of ion beams to clean such structures may require the use of very low energy for present day device dimensions to ensure that unwanted damage, such as sidewall damage, is minimized. Such low ion energy however, may compromise the cleaning or etch process in regions of the structures where cleaning is desired.

SUMMARY

In view of the above, it will be appreciated that there is a need to improve ion processing technologies to process patterned structures while minimizing unwanted damage. Embodiments of the present invention are directed to methods and structures for improved. In one embodiment, a method of processing a substrate includes providing a set of patterned structures separated by a first gap on the substrate. The method further includes directing first implanting ions to the substrate at a first ion energy during a first exposure, where the first implanting ions are effective to impact the substrate in regions defined by the first gap. The method also includes directing depositing ions to the substrate in a second exposure subsequent to the first ion exposure, the second ions effective to deposit material on at least a portion of the set of patterned structures to form expanded patterned structures, where the expanded patterned structures are characterized by a second gap smaller than the first gap. The method includes directing second implanting ions to the substrate at a second ion energy during a third exposure subsequent to the second exposure, where the second implanting ions are effective to impact the substrate in regions defined by the second gap, the second ion energy comprising a higher ion energy than the first ion energy.

In another embodiment, a method of patterning a substrate includes forming a set of patterned structures on the substrate,

2

where the patterned structures are defined by a first gap that separates adjacent patterned structures. The method also includes directing depositing ions over a range of angles of incidence to the substrate, where the depositing ions are effective to deposit material on at least a portion of the set of patterned structures to form expanded patterned structures, where the expanded patterned structures are characterized by a second gap between adjacent patterned structures that is smaller than the first gap. The method further includes directing implanting ions to the substrate in substrate regions between adjacent patterned structures during an implantation exposure subsequent to the deposition exposure, where the implanting ions are effective to impact the substrate in regions defined by the second gap, wherein an implant width of the implanted substrate regions is equal to about the first gap.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A to 1G depict various processes involved in patterning a substrate consistent with the present embodiments;

FIG. 2A illustrates details of a substrate patterned according to the present embodiments;

FIG. 2B illustrates details of a substrate patterned according to conventional techniques;

FIGS. 3A to 3C depict various processes involved in patterning a substrate consistent with the present embodiments;

FIG. 4A depicts an exemplary patterned substrate consistent with the present embodiments;—

FIG. 4B depicts another exemplary patterned substrate consistent with the present embodiments;

FIGS. 5A to 5C depict operation of an exemplary apparatus for patterning a substrate according to various embodiments; and

FIGS. 6A to 6B depict various processes involved in patterning a substrate consistent with another embodiment.

DESCRIPTION OF EMBODIMENTS

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention, however, may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, like numbers refer to like elements throughout.

In various embodiments, novel substrate processing is disclosed using a combination of deposition on patterned substrate structures with screen ion implantation. In particular embodiments, one or more ion implantation and/or etching treatments are interspersed with one or more deposition steps. Consistent with particular embodiments ion energy may be scaled upwardly between successive ion implantation/etching treatments. In such processes a deposition process interspersed between successive first and second ion implantation/etch treatment is employed to close a gap between neighboring structures, thereby limiting the line of site of ions incident upon the structures during the second ion treatment. In this manner lateral straggle of ions during the second ion treatment is controlled and may be limited to regions within a desired implantation region.

FIGS. 1A to 1C depict different operations involved in processing a substrate according to the present embodiments. The base **102** of substrate **100** may comprise one or more layers, but is shown as a single layer for purposes of illustra-

3

tion. A set of patterned structures **104** is provided on the base **102** in order to mask portions of the base **102** to subsequent processing. In the example of FIG. **1A** ions **106** are directed toward the substrate **100** to perform ion implantation in portions of the base **102** that are not covered by the patterned structures **104**. The ions **106** may be used to introduce dopants into select regions of the substrate **100** in one example in which the base **102** includes a semiconductor region. In another example, the ions **106** may be used to render select regions of the substrate **100** inactive such as in a magnetic memory discussed further below.

In the example of FIGS. **1A** to **1C** ion implantation is to be performed in unmasked regions of the base **102** to a predetermined depth **D** as illustrated in FIG. **1C**. However, to ensure that ion damage to regions of the base **102** underneath the patterned structures **104** remains minimal, a deep ion implantation process shown in FIG. **1C** is not performed until after a deposition process that forms tops **117** shown in FIG. **1B**. In particular, in the process shown in FIG. **1A**, a shallow ion implantation process is performed using the ions **106**. The ion energy of ions **106** may be set to a level in which lateral straggle (or simply "straggle") **110** is within a designed range such that the shallow implantation region **108** does not encroach excessively under the patterned structures **104**. Accordingly, the depth **D2** of the shallow implantation region **108** may be less than the predetermined depth **D**. As shown in FIG. **1A**, because the ion energy for ions **106** is relatively low, the straggle **110** is relatively low. In one example, the trajectories of ions **106** may be perpendicular to a plane **118** of the substrate **100** before the ions impact the substrate **100**. Accordingly, the ions are shadowed by the patterned structures **104** at the edges **112**. FIG. **1F** presents a close-up view of the edge of a patterned structure **104** during the stage illustrated in FIG. **1A**. The total area that ions **106** may impact the base **102** is therefore defined by the value of **G** between adjacent patterned structures **104**. Unshadowed ions that impact the base **102** in regions close to the edge **114** and implant into the base **102** may therefore travel laterally within the base **102** to an extent defined by the magnitude of straggle **110**. Accordingly, because the straggle **110** is relatively low, the edge **114** of the implantation region **108** is close to the edge **112** of the patterned structures **104**.

In order to implant the base **102** to the depth **D**, a second, deeper, implantation is performed as shown in FIG. **1C**. However, a deeper implantation process requires higher ion energy for a given ion species which also results in greater straggle. In order to locate the edge of a deeper implantation region close to or coincident with the edge **114**, the gap between neighboring or adjacent patterned structures **104** is reduced before the deep implantation is performed. Referring to FIGS. **1A** and **1B**, initially patterned structures **104** are separated by a gap **G** shown in FIG. **1A**. Subsequently, in FIG. **1B**, a deposition process is performed which results in formation of material on the patterned structures **104**, resulting in expanded patterned structures **116**. The expanded patterned structures **116** may be formed by known deposition processes including chemical vapor deposition, ion assisted deposition, or other deposition process. In the example shown, the expanded patterned structures **116** have mushroom like tops as viewed in cross-section, which define a smaller gap **G2** between adjacent expanded patterned structures **116**. The smaller gap **G2** defines a total area in which ions may impact the base **102**. In particular, the edge **119** of each gap is located away from the edge **112** of the original patterned structures **104**. Accordingly, the "view factor" for subsequent ions, which represents the projected area of the

4

base **102** that is exposed to line of sight ions, is reduced after the formation of the expanded patterned structures **116**.

Subsequently, when high energy ions **120** are implanted into the base **102**, the edge **121** of the high energy ions **120** is displaced away from the edge **112** as shown in the close-up of the process of FIG. **1C** shown in FIG. **1G**. Accordingly, when the high energy ions **120** implant into the substrate **100**, a greater straggle **126** may be accommodated without damage to regions under the patterned structures **104**. As shown, the high energy ions **120** create a deep implantation region **124** and doubly implanted region **122**. However, because of the smaller gap **G2**, the greater straggle **126** only results in creating a deep implantation region **124** whose edge **127** is close to or coincident with the edge **114**. In this manner, the screening provided by the deposition in FIG. **1B** results in generating a width of the composite implantation region **128** that is relatively constant as a function of depth in the base **102**. This also leads to formation under each patterned structure **104** of an unimplanted region **129** that also has a relatively constant width as a function of depth in the base **102**.

In some embodiments, the process cycle illustrated in FIGS. **1B** and **1C** may be iterated in one or more additional process cycles of deposition and implantation. FIGS. **1D** to **E** depict one such additional process cycle that may follow the processes illustrated in FIGS. **1A** to **1C**. After formation of the composite implantation region **128** a further deposition is performed, which results in the formation of the expanded patterned structures **130**. As shown in FIG. **1D**, the expanded patterned structures **130** include a larger mushroom type feature that creates a smaller gap **G3** between adjacent expanded patterned structures **130**. This creates a still smaller view factor for ions subsequently directed to the substrate **100** in regions between the expanded patterned structures **130**, as shown in FIG. **1E**. In the instance shown in FIG. **1E** ions **132** are directed to the substrate **100** and only those that pass through the gap **G3** implant into the base **102**. The edge **134** of the ions **132** is displaced away from the edge **112** as shown. Accordingly, when the ions **132** implant into the base **102**, a greater straggle **136** may be accommodated without damage to regions under the patterned structures **104**. As shown, the high energy ions **132** create a deeper implantation region **138**. However, because of the smaller gap **G3**, the greater straggle **136** only results in creating a deeper implantation region **138** whose edge **140** is close to or coincident with the edges **114** and **127**. In this manner, the screening provided by the deposition in FIG. **1E** results in the ability to generate a width of the composite implantation region **142** that is relatively constant as a function of depth in the base **102**. This also leads to formation under each patterned structure **104** of an unimplanted region **144** that also has a relatively constant width as a function of depth in the base **102**.

The above process outlined in FIGS. **1A** to **1G** affords multiple advantages for patterning substrates in comparison to conventional approaches. For one, the process affords the ability to decouple the implantation width from implantation depth for a region to be implanted in a manner not achieved by conventional approaches. This is illustrated by FIGS. **2A** and **2B** which depict an exemplary patterned substrate structure consistent with the present embodiments and a conventional patterned substrate, respectively. For purposes of illustration, it may be assumed that a device design specifies a design width **202** and depth **D3** for an active region of a device that is separated by an unimplanted region. The implantation may be used to isolate adjacent active areas from one another for example. In particular, the design width **202** and depth **D3** may be used to define an active region of a memory device as detailed further below.

In FIG. 2A the structure of a substrate **100** is shown after the processing discussed above with respect to FIGS. 1A-1G. As shown, the composite implantation region **142** whose depth is D3 also has a width W_3 , which defines a width W_1 for the unimplanted region **144**. As illustrated, the width W_1 closely approximates the design width **202**. This is achieved by the iterative processes detailed above with respect to FIGS. 1A to 1E.

In contrast the conventional structure **200** shown in FIG. 2B does not achieve the desired dimensions D3 and design width **202**. The conventional structure **200** is fabricated by implantation into the substrate base **102** in the presence of the patterned structures **104**. In order to achieve the proper depth D3 for an active region, the ion energy for implantation to form the implantation region **204** is set to a value that is sufficiently high to cause implantation to the depth D3. However, this engenders a straggle that causes the implantation regions **204** to substantially undercut the patterned structures **104**, leading to a width W_2 for the unimplanted region **206** that is much smaller than the design width **202**.

In a different example, a device design may specify a depth D3 and design width **210** for a doped substrate region to be formed by ion implantation. As further illustrated in FIG. 2A, the present embodiments are able to achieve the specified depth D3 and design width **210**, which is approximated by the width W_3 of the composite implantation region **142** shown. As discussed above, the present embodiments are able to achieve a uniform implantation width as a function of depth by depositing material on the patterned structures **104** to narrow the gap between adjacent patterned structures and thereby narrow the region of the base **102** that initially intercepts implanting ions. This affords the ability to perform deeper implantation as needed, since the increased lateral straggle at high energies can be compensated for by the greater distance of ions from the initial edge of the patterned structures **104** caused by the expanded patterned structures **130**. In contrast, the width W_4 of implantation region **204** is substantially greater than design width **210** because the large lateral straggle resulting from ions implanted at sufficient energy to achieve the depth D3 causes ions to implant well under the edges of the patterned structures **104**.

FIGS. 3A to 3C depict operations involved in processing a substrate according to additional embodiments. In this case the substrate **300** includes multiple layers including a base layer **302** and overlayer **308** and top layer **306**. The substrate **300** is further provided with a set of patterned structures **104** on the base layer **302** in order to mask portions of the base layer **302** to subsequent processing. In the example of FIG. 3A ions **304** are directed toward the substrate **300** to perform ion implantation in portions of the substrate **300** that are not covered by the patterned structures **104**. The ions **304** may be used to introduce dopants into select regions of the substrate **300** in one example in which the substrate **300** includes a semiconductor region. In another example, the ions **304** may be used to render select regions of the substrate **300** inactive such as in a magnetic memory discussed further below.

In the example of FIGS. 3A to 3C a set of multiple ion implantation processes are performed. The multiple ion implantation processes may be tailored according to the layer thickness of layers to be implanted in one example. For instance, as illustrated in FIG. 3A ions **304** are implanted to a depth D4 corresponding to the thickness of top layer **306**. The top layer **306** may be sufficiently thin as to require only a low ion energy for ions to implant to the depth D5 in one example. This may result in minimal straggle such that implanted regions **310** do not encroach significantly under the patterned structures **104**.

Subsequently, as shown in FIG. 3B, deposition is performed to create the expanded patterned structures **312**. Finally, as illustrated in FIG. 3C another ion implantation process is performed. In this case, the ion energy of ions **314** is designed to implant to a depth corresponding to the bottom of overlayer **308** so that the entire overlayer **308** is implanted in regions not masked by the expanded patterned structures **312**. Thus, the ion energy used in the process of FIG. 3C to form the implantation region **316** is higher than that used to implant the top layer **306**. Because of the reduced gap G4 between adjacent expanded patterned structures **312**, the resulting width of the composite implantation region **318** may be the same in both top layer **306** and overlayer **308**.

In addition to changing the ion energy between successive implantation operations, the ion dose in each of multiple implantation steps may be tailored to achieve the desired overall ion dose within the region to be implanted. Also, in further embodiments, the composition of ion species may be varied between implantation operations. Returning to FIGS. 3A to 3B, in one example the top layer **306** and overlayer **308** may represent different layers in a stack of magnetic memory layers whose chemical and/or physical properties are different from one another. It may be desirable to implant ions into such layers between patterned structures **104** as illustrated in order to magnetically isolate portions of the layers that are disposed underneath the patterned structures **104**. The implantation of the proper ion species and dose into exposed regions of top layer **306** and overlayer **308** may render such regions magnetically "dead" after the ion exposure. This serves to define a magnetic element or cell whose width is defined by the width of the unimplanted region underneath a patterned structure **104**. Because different combinations of ion species may be effective in magnetically deadening different layers of a memory stack, the composition of ions **304** may be different from the ions **314** in some embodiments for patterning a magnetic memory.

As noted above, multiple iterations of implantation and deposition may be performed to achieve an implanted region of uniform width as a function of depth. In embodiments of patterning magnetic memory it may be necessary to implant into half a dozen or more layers to perform magnetic isolation. In such cases, individual layers may be separately implanted or more than one layer may be implanted in a single implantation step followed by deposition, an additional implantation step and so forth.

FIGS. 4A and 4B present a cross-sectional depiction of exemplary magnetic memory structures after patterning consistent with the present embodiments. The structure **400** in FIG. 4A includes a set of expanded patterned structures **402** disposed upon a stack of layers **404**, **406**, **408**, **410**, **412**, **414**, **416**, and **418**. The expanded patterned structures **402** are illustrated as having an original part **402A** and cap **402B** that represents additional material formed during one or more deposition steps. The structure **400** includes implantation regions **420**, which may result from multiple implantation processes as generally shown in the preceding FIGS. The implantation regions **420** serve to magnetically isolate regions **422** that lie under respective expanded patterned structures **402**. Because the implantation regions **420** are formed with the aid of caps **402B**, deep implantation may be performed without causing straggle of implanting ions to move the border of the implantation regions **420** beyond a desired position. Accordingly, the implantation regions **420** may be maintained at a more uniform width throughout the stack of layers **404-416** as opposed to that achieved by conventional processing.

In one specific example, the layers **404** and **416** may be tantalum, which is used as a contact layer, and the layer **418** may be an insulator. In order to magnetically and electrically isolate regions **422** from one another it may therefore be desirable to implant through the layer **416** as illustrated in FIG. **4A**. In one example, the layers **406**, **410**, and **414** may be cobalt and the layers **408** and **412** may be platinum. Each of these layers may be implanted in a separate step or in combination with other layers according to various embodiments. In addition, more than one different implantation step may be performed between successive deposition steps. For example it may be desirable to implant a thin layer of cobalt with different ions than those used to implant an adjacent layer of platinum. However, the total thickness of one cobalt layer and its adjacent platinum layer may be relatively small, such that the straggle does not vary significantly between the two implantation procedures. Accordingly, ion implantation may be performed into the cobalt layer and a subsequent ion implantation performed into an adjacent underlying platinum layer without depositing a layer between implantation procedures to adjust the gap between adjacent patterned structures, as may be necessary when the implant depth is to vary significantly between successive implantation steps.

The structure **430** in FIG. **4B** includes a set of expanded patterned structures **402** disposed upon a stack of layers **432**, **434**, **436**, **438**, **440**, **442**, **444**, and **446**. The structure **430** includes implantation regions **450**, which may result from multiple implantation processes as generally shown in the preceding FIGS. The implantation regions **450** may also serve to magnetically isolate regions **452** that lie under respective patterned structures **402**. Because the implantation regions **450** are formed with the aid of caps **402B**, deep implantation may be performed in which the resultant straggle of implanting ions does not move the border of the implantation regions **450** beyond a desired position. Accordingly, the implantation regions **450** may be maintained at a more uniform width throughout the stack of layers **432-448** as opposed to that achieved by conventional processing.

In one example, the layers **432**, **436** and **440** may be cobalt, the layer **434** MgO, the layers **438** and **446** ruthenium, the layer **442** PtMn, the layer **444** Ta, and the layer **448** oxide. Each of these layers may be implanted in a separate step or in combination with other layers according to various embodiments. In addition, more than one different implantation step may be performed between successive deposition steps. As illustrated, the implantation regions **450** extend through layer **446**, which may facilitate both electrical and magnetic isolation of adjacent regions **452**.

In order to facilitate processing of substrates in which multiple operations including ion implantation and deposition occur, in various embodiments, apparatus are supplied to perform multiple operations including at least ion implantation and deposition. In one example, an apparatus may include a plasma chamber that is configured to perform both ion implantation and deposition. The gas composition may be altered between implantation and deposition steps in accordance with known methods. For example, to form the structures illustrated in FIGS. **4A**, **4B**, ions such as inert gas ions, nitrogen, oxygen, phosphorous, silicon may be generated in a plasma for implantation. In order to perform deposition of the cap **402B** a known silicon-containing, carbon-containing or other precursor gas may be supplied to the plasma chamber to form ion species that result in deposition of a respective silicon or carbon containing material. The embodiments are not limited in this context.

In additional embodiments, a multichamber apparatus is used in order to provide separate chambers to perform ion

implantation as opposed to deposition. FIGS. **5A** to **5C** depict operation of a processing system **500** that includes multiple process chambers in accordance with the present embodiments. The multiple chambers may both be plasma chambers, for example. As shown in FIG. **5A**, the plasma system **502** and plasma system **504** are each coupled to the process chamber **520** so that ions produced in the respective plasma chambers **506**, **508** may be directed to substrates within the process chamber **520**.

In one example, plasma chamber **506** is used for ion implantation and plasma chamber **508** is used for producing ions and/or ion-derived species for deposition. In the scenario specifically shown in FIG. **5A**, a plasma **510** is generated in the plasma chamber **506**, producing the implanting ions **514**. The implanting ions **514** are extracted from the plasma chamber **506** and directed toward the substrate **100**, which is disposed in a first position to intercept the implanting ions **514**. After an implantation operation is performed, the substrate stage **522** may move the substrate **100** along the direction **524** to a second position to receive a deposition treatment. As shown in FIG. **4B** the substrate **100** is moved to a position to intercept depositing ions **516** from a plasma **512** that is generated in the plasma chamber **508**. In this case the depositing ions **516** may be effective to deposit material on substrate **100**.

As illustrated in FIG. **5B** depositing ions **516** may be directed to the substrate **100** over a range of angles, which may help to generate a mushroom-like top to patterned structures when the depositing ions **516** condense on the substrate **100**, as generally illustrated in the preceding figures. In some embodiments, the plasma chamber **508** may include a plasma sheath modifier (PSM) as known in the art to generate depositing ions **516** over a desired angular range. A plasma sheath modifiers may act to modify a shape of a plasma sheath boundary proximate the region in which depositing ions **516** are extracted from the plasma chamber **508** and directed toward substrate **100**. In particular, the plasma sheath boundary in regions where the plasma **512** faces the substrate **100** may assume a curved shape such that depositing ions **516** are extracted from the plasma **512** over a range of angles. Accordingly the depositing ions **516** impinge upon the substrate **100** over a range of angles with respect to a plane **525** of substrate **100** as illustrated. Additional description of general features of a processing system with a PSM can be found in co-pending U.S. patent application Ser. No. 12/417,929, filed Apr. 3, 2009, and issued as U.S. Pat. No. 7,767,977; Ser. No. 12/418,120, filed Apr. 3, 2010; Ser. No. 12/644,103, filed Dec. 22, 2009; and Ser. No. 12/848,354, filed Aug. 2, 2010, each of which is herein incorporated in its entirety by reference.

After an exposure to depositing ions **516** is completed, the substrate **100** may once more be moved to the first position to receive further ion treatment from plasma chamber **506**. FIG. **5C** illustrates the scenario in which a plasma **526** is generated in the plasma chamber **506** from which implanting ions **528** are extracted. The plasma **526** may be generally the same as the plasma **510** or may be different than the plasma **510** in different embodiments. In various embodiments, the implanting ions **528** are extracted with a different ion energy than are implanting ions **514** in order to perform a deeper implantation.

In additional embodiments, a single implantation procedure is employed to form implantation regions. FIGS. **6A** to **6B** depict different operations involved in processing a substrate according to a single implantation embodiment. In this case the substrate **300** includes the multiple layers including a base layer **302** and overlayer **308**, top layer **306** and set of

9

patterned structures **104** as discussed above with respect to FIGS. **3A-3C**. In the operation depicted at FIG. **6A** a deposit **602** is formed on the patterned structures **104** to form the expanded patterned structures **604**. This results in a gap **G5** between adjacent patterned structures. The gap **G5** is arranged to accommodate lateral straggle resulting from implantation into the layers **306, 308** to the depth **D5**, which may represent the total depth of the layers **306, 308**. Turning now to FIG. **6B** ions **606** are implanted into the substrate **300**. The unscreened ions that pass through the gap region between adjacent patterned structures **604** implant into the substrate **300** forming the implanted regions **608**. Because the edge **610** of the ions **606** is spaced away from the edge **612** of the original patterned structures **104**, the edge **614** of the implanted regions **608** does not excessively encroach under the patterned structures **104**. The width of the regions **616** under the patterned structures **104** where the substrate **300** remains unimplanted may therefore be maintained at a desirable size even though a relatively deep implantation is performed.

The present invention is not to be limited in scope by the specific embodiments described herein. Indeed, other various embodiments of and modifications to the present disclosure, in addition to those described herein, will be apparent to those of ordinary skill in the art from the foregoing description and accompanying drawings. Thus, such other embodiments and modifications are intended to fall within the scope of the present disclosure. Further, although the present disclosure has been described herein in the context of a particular implementation in a particular environment for a particular purpose, those of ordinary skill in the art will recognize that its usefulness is not limited thereto and that the present disclosure may be beneficially implemented in any number of environments for any number of purposes. Accordingly, the subject matter of the present disclosure should be construed in view of the full breadth and spirit of the present disclosure as described herein.

What is claimed is:

1. A method of processing a substrate comprising: providing a set of patterned structures separated by a first gap on the substrate; directing first implanting ions to the substrate at a first ion energy during a first exposure, the first implanting ions effective to impact the substrate in regions defined by the first gap; directing depositing ions to the substrate in a second exposure subsequent to the first ion exposure, the depositing ions effective to deposit material on at least a portion of the set of patterned structures to form expanded patterned structures, the expanded patterned structures characterized by a second gap smaller than the first gap; and directing second implanting ions to the substrate at a second ion energy during a third exposure subsequent to the second exposure, the second implanting ions effective to impact the substrate in regions defined by the second gap, the second ion energy comprising a higher ion energy than the first ion energy, wherein the substrate is disposed in a first position during the first exposure, the method further comprising: moving the substrate to a second position before the second exposure;

10

- performing the second exposure while the substrate is disposed in the second position; moving the substrate to the first position before the third exposure;
2. The method of claim **1**, further comprising performing one or more exposure cycles, an exposure cycle comprising: directing additional implanting ions to the substrate at an ion energy higher than ion energy of implanting ions in a previous exposure; and directing additional depositing ions to the substrate, the additional depositing ions effective to deposit material on at least a portion of the set of patterned structures to form expanded patterned structures.
 3. The method of claim **2**, wherein a gap between patterned features decreases in dimension between successive exposure cycles.
 4. The method of claim **1**, further comprising: directing the first implanting ions by extracting the first implanting ions from a first source; directing the depositing ions by extracting the depositing ions from a second source; and directing the second implanting ions by extracting the second implanting ions from the first source.
 5. The method of claim **4**, wherein the first source comprising a first plasma source and the second source comprising a second plasma source.
 6. The method of claim **1**, wherein the directing the depositing ions comprising depositing the depositing ions at least on top portions of the patterned structures wherein the expanded patterned structures have a mushroom shape cross-section.
 7. The method of claim **1**, further comprising directing the second implanting ions over a range of angles of incidence with respect to a plane of the substrate.
 8. The method of claim **1**, wherein the first implanting ions generate a first ion straggle that is less than a second ion straggle generated by the second implanting ions.
 9. The method of claim **1**, wherein the first and second implanting ions are directed at a perpendicular incidence with respect to a plane of the substrate.
 10. The method of claim **1**, further comprising: directing third implanting ions to the substrate at a third ion energy, the third implanting ions effective to impact the substrate in regions defined by the first gap, wherein the directing the first implanting ions and the directing the third implanting ions are performed before the directing the depositing ions.
 11. The method of claim **1**, wherein the substrate is disposed in a first position during the directing the depositing ions, the method further comprising: Moving the substrate to a second position before the directing the implanting ions; and directing the implanting ions while the substrate is disposed in the second position.
 12. The method of claim **1**, wherein the directing depositing ions comprising depositing ions at least on top portions of the patterned structures wherein the expanded patterned structures have a mushroom shape cross-section.

* * * * *